



Datos dimensionales (Pulgadas) Dimensional data (Inches)

| A | B | C | D | E | L | K | M | N |
|--------|--------|-------|-------|-------|--------|--------|--------|--------|
| ±0.002 | ±0.002 | REF. | MIN. | MAX. | ±0.020 | ±0.005 | ±0.005 | ±0.015 |
| 5/8 | 1.250 | 0.937 | 1.562 | 1.375 | 0.875 | 0.312 | 0.344 | 0.406 |
| 3/4 | 1.375 | 1.062 | 1.687 | 1.500 | 0.875 | 0.375 | 0.344 | 0.406 |
| 7/8 | 1.500 | 1.187 | 1.812 | 1.625 | 0.937 | 0.375 | 0.344 | 0.406 |
| 1 | 1.625 | 1.312 | 2.000 | 1.812 | 1.000 | 0.375 | 0.375 | 0.438 |
| 1-1/8 | 1.750 | 1.437 | 2.125 | 1.937 | 1.062 | 0.375 | 0.375 | 0.438 |
| 1-1/4 | 1.875 | 1.562 | 2.250 | 2.062 | 1.062 | 0.375 | 0.375 | 0.438 |
| 1-3/8 | 2.000 | 1.687 | 2.437 | 2.250 | 1.125 | 0.375 | 0.375 | 0.438 |
| 1-1/2 | 2.125 | 1.812 | 2.562 | 2.375 | 1.125 | 0.375 | 0.375 | 0.438 |
| 1-5/8 | 2.375 | 2.000 | 2.937 | 2.718 | 1.375 | 0.375 | 0.438 | 0.500 |
| 1-3/4 | 2.500 | 2.125 | 3.062 | 2.750 | 1.375 | 0.375 | 0.438 | 0.500 |
| 1-7/8 | 2.625 | 2.250 | 3.187 | 2.875 | 1.500 | 0.375 | 0.438 | 0.500 |
| 2 | 2.750 | 2.375 | 3.312 | 3.000 | 1.500 | 0.375 | 0.438 | 0.500 |
| 2-1/8 | 3.000 | 2.500 | 3.625 | 3.250 | 1.687 | 0.500 | 0.500 | 0.562 |
| 2-1/4 | 3.125 | 2.625 | 3.750 | 3.375 | 1.687 | 0.500 | 0.500 | 0.562 |
| 2-3/8 | 3.250 | 2.750 | 3.875 | 3.500 | 1.812 | 0.500 | 0.500 | 0.562 |
| 2-1/2 | 3.375 | 2.875 | 4.000 | 3.625 | 1.812 | 0.500 | 0.500 | 0.562 |
| 2-5/8 | 3.375 | 3.000 | 4.312 | 3.875 | 1.937 | 0.500 | 0.562 | 0.625 |
| 2-3/4 | 3.500 | 3.125 | 4.437 | 4.000 | 1.937 | 0.500 | 0.562 | 0.625 |
| 2-7/8 | 3.750 | 3.250 | 4.562 | 4.125 | 2.062 | 0.500 | 0.562 | 0.625 |
| 3 | 3.875 | 3.375 | 4.687 | 4.250 | 2.062 | 0.500 | 0.562 | 0.625 |

Dimensiones dentro de la Norma ASTM (Excepto Columna "C").
La Columna "C" depende del fabricante de la bomba.
Dimensions inside Norma ASTM (except "C" column).
The "c" column depends on the manufacturer of the pump.

CONDICIONES DE OPERACIÓN

Velocidad: Hasta 3,600 RPM.
Presion: 250 PSI (17.6Kg/cm²)
Temperatura: -57°C ~ 204°C*
**Depende del material del elastómero*

OPERATION CONDITIONS

Speed: Up to 3,600 RPM.
Pressure: 250 PSI (17.6Kg/cm²)
Temperature: -57°C ~ 204°C*
**Depends on elastomer material*


Partes Metalicas: Acero Inoxidable 304
Metal Parts: 304 Stainless Steel

Resorte: Acero inoxidable 304
Spring: 304 Stainless Steel

Cara: Carbón Grafito, Carburo de Silicio,
Carburo de Tungsteno
Rotary Face: Graphite, Silicon Carbide,
Tungsten Carbide

Empaque: NBR (Nitrilo®), FKM (Vitón®)
CR(Neopreno®), EPR. (EPDM)
Bellow: NBR (Nitrile®), FKM (Viton®),
CR (Neoprene®), EPR (EPDM)

Asiento: Cerámica, Carburo de Silicio, Carburo
de Tungsteno, Acero Inoxidable, Ni-Resist
Seat: Ceramic, Silicon Carbide, Tungsten Carbide,
Stainless Steel, Ni-Resist

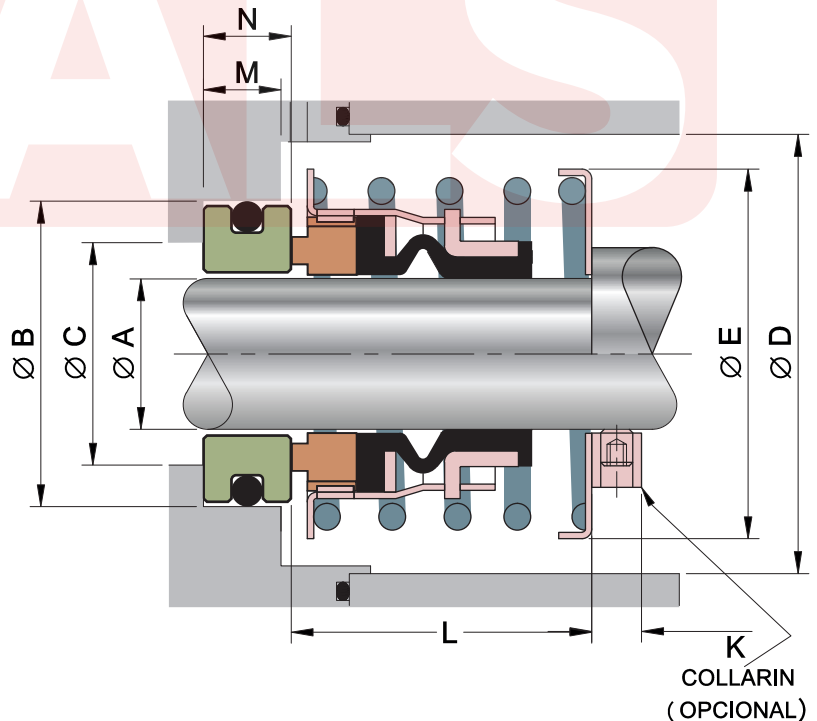

K
COLLARIN
(OPCIONAL)